



GLYSANTIN® Graphs



EVO 1821

® = reg. trademark of BASF SE

A brand of
BASF
We create chemistry



Physical properties of GLYSANTIN® coolants

Because the main physical properties of GLYSANTIN® coolants relate to the mixing ratio of ethylene glycol/water, we have compiled this data under normal pressure in the range from -40 to +100 °C for different concentrations. In principal these are valid for all ethylene glycol based GLYSANTIN® products. Minor differences between these values are based on the different additive packages of each coolant.

Da die wesentlichen physikalischen Eigenschaften der GLYSANTIN® Kühlerschutzmittel auf das Mischverhältnis von Ethylenglykol/Wasser zurückzuführen sind, haben wir eine Sammlung von Daten unter Normaldruck im Bereich von -40 bis +100 °C für unterschiedliche Konzentrationen erstellt. Diese sind prinzipiell für alle ethylenglykol-basierten GLYSANTIN® Produkte gültig. Geringfügige Unterschiede zu diesen Werten sind auf die unterschiedlichen Additivpakete der einzelnen Kühlmittel zurückzuführen.


Note:
GLYSANTIN® GG40® is not covered by these graphs due to the glycerine content.

Zur Beachtung:
GLYSANTIN® GG40® ist aufgrund des Glyceringehaltes nicht Gegenstand dieser Diagramme.



Density


of mixtures of GLYSANTIN® and water as a function of temperature and concentration.

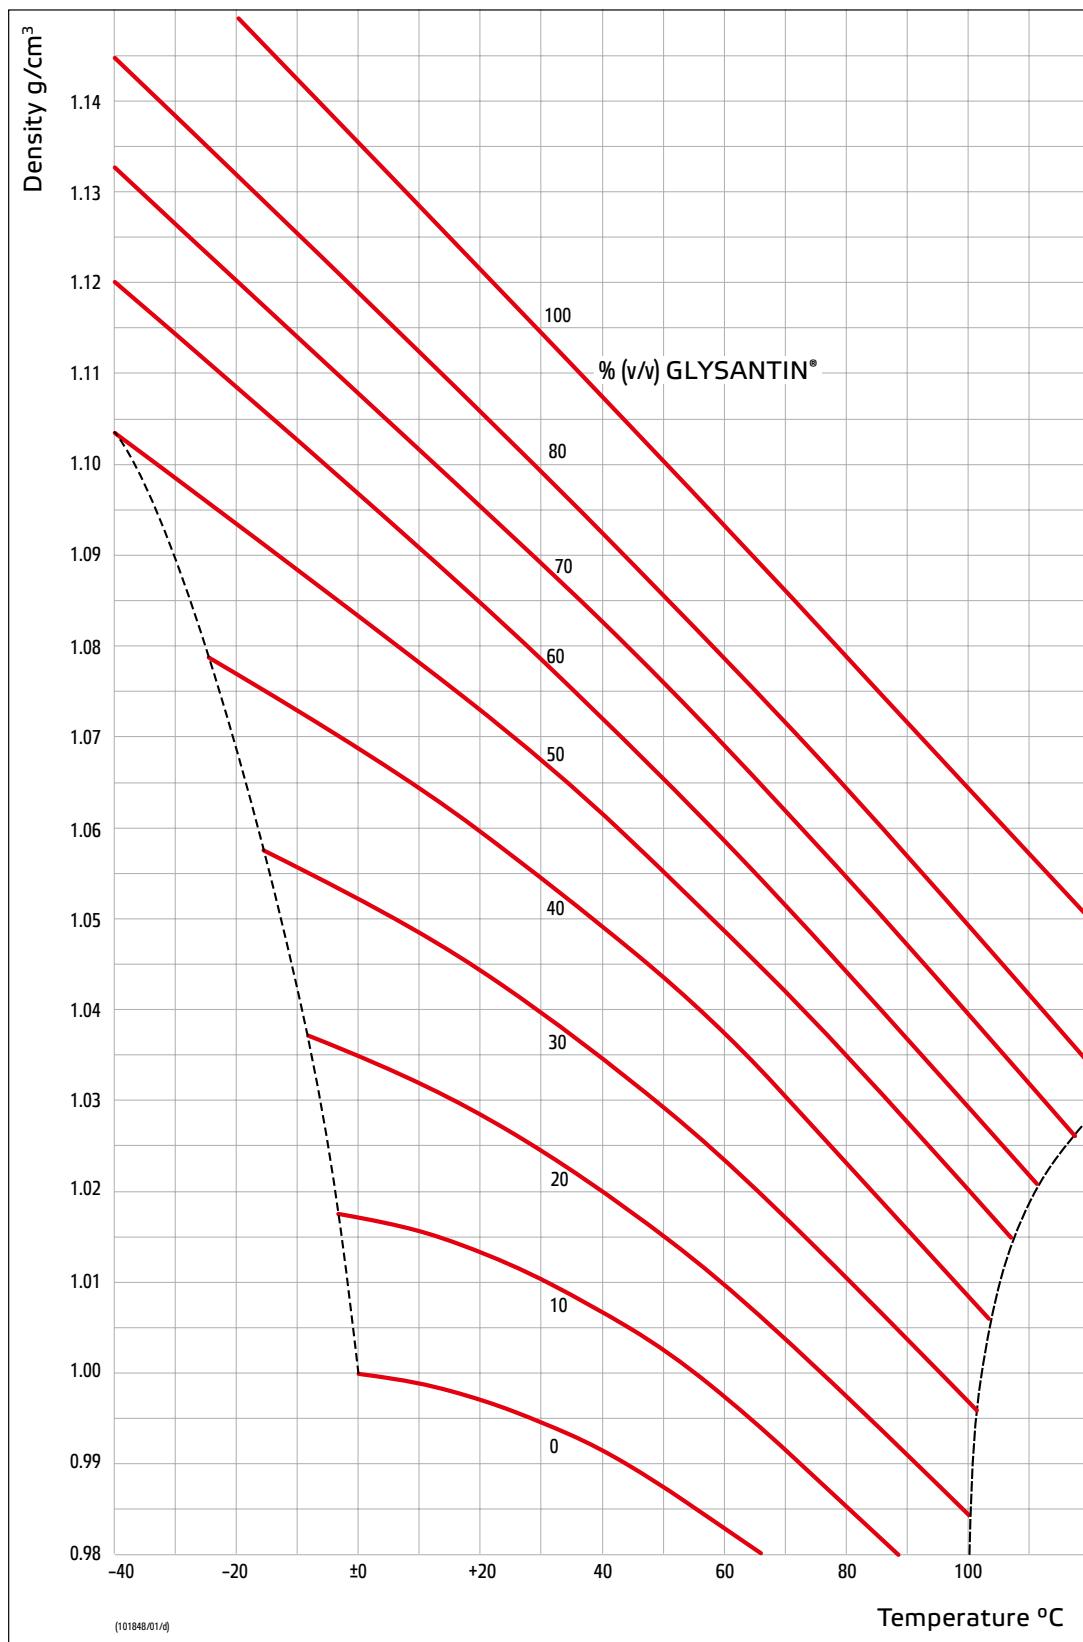



Viscosity


of mixtures of GLYSANTIN® and water as a function of temperature and concentration.

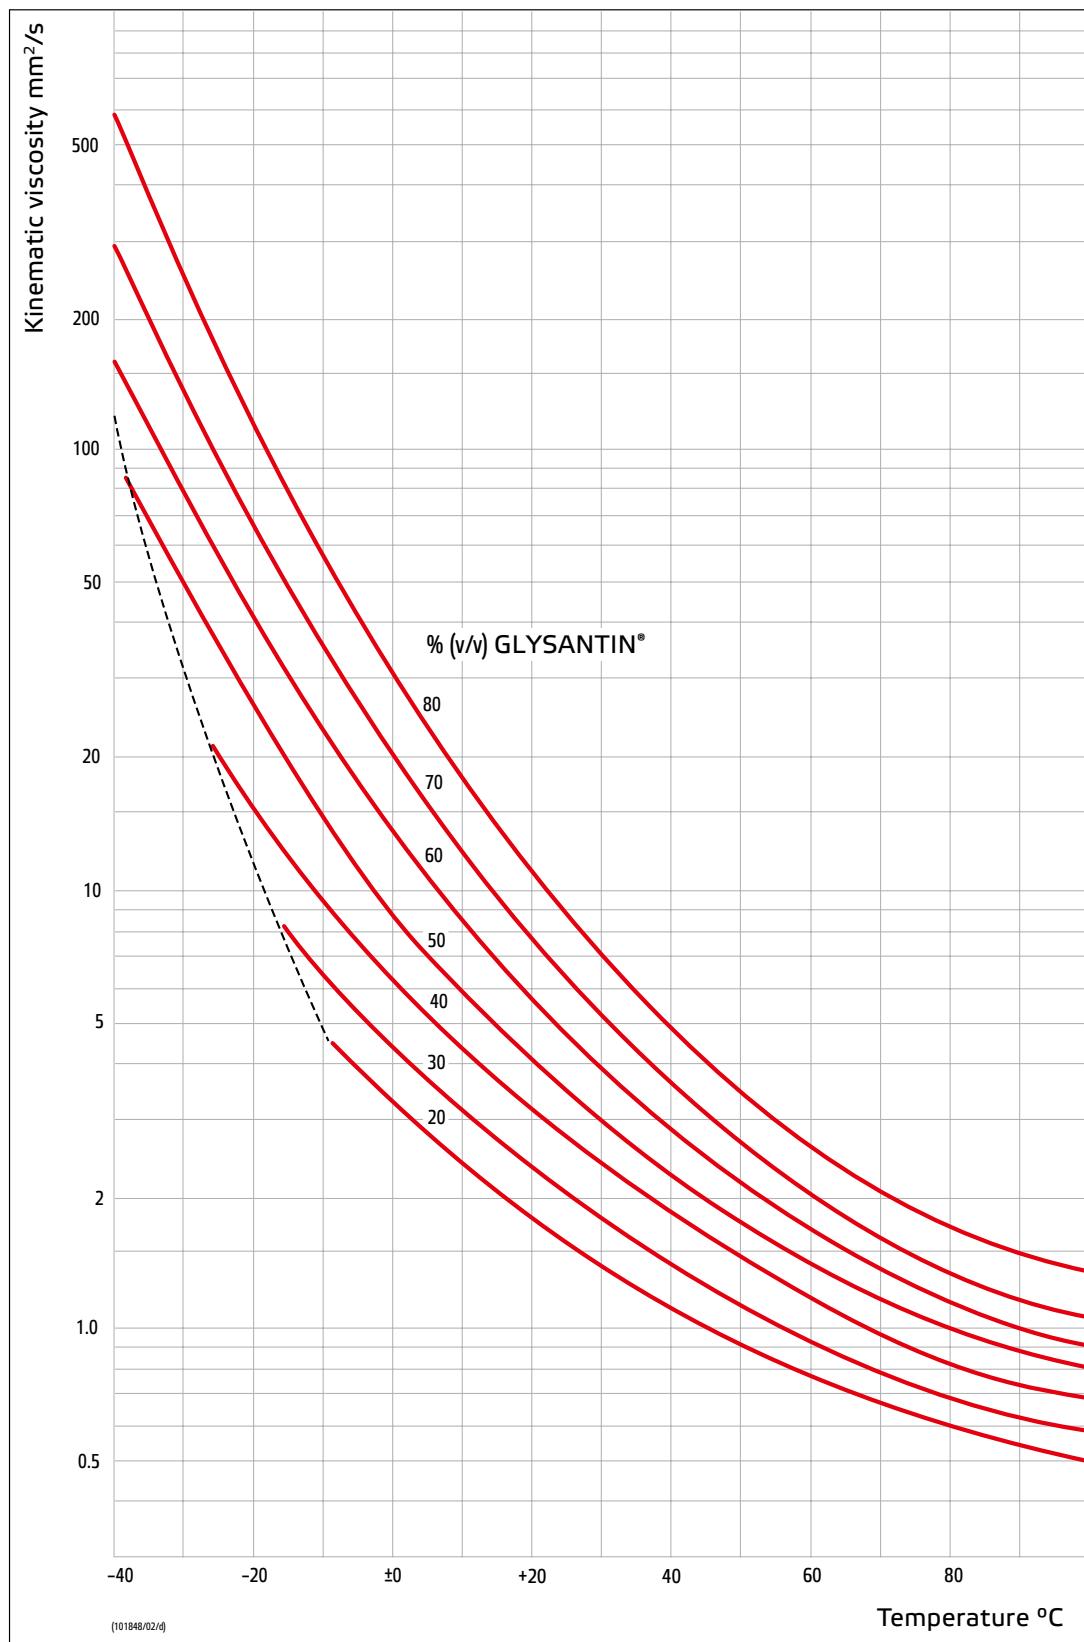



Specific heat capacity


of mixtures of GLYSANTIN® and water as a function of temperature and concentration.

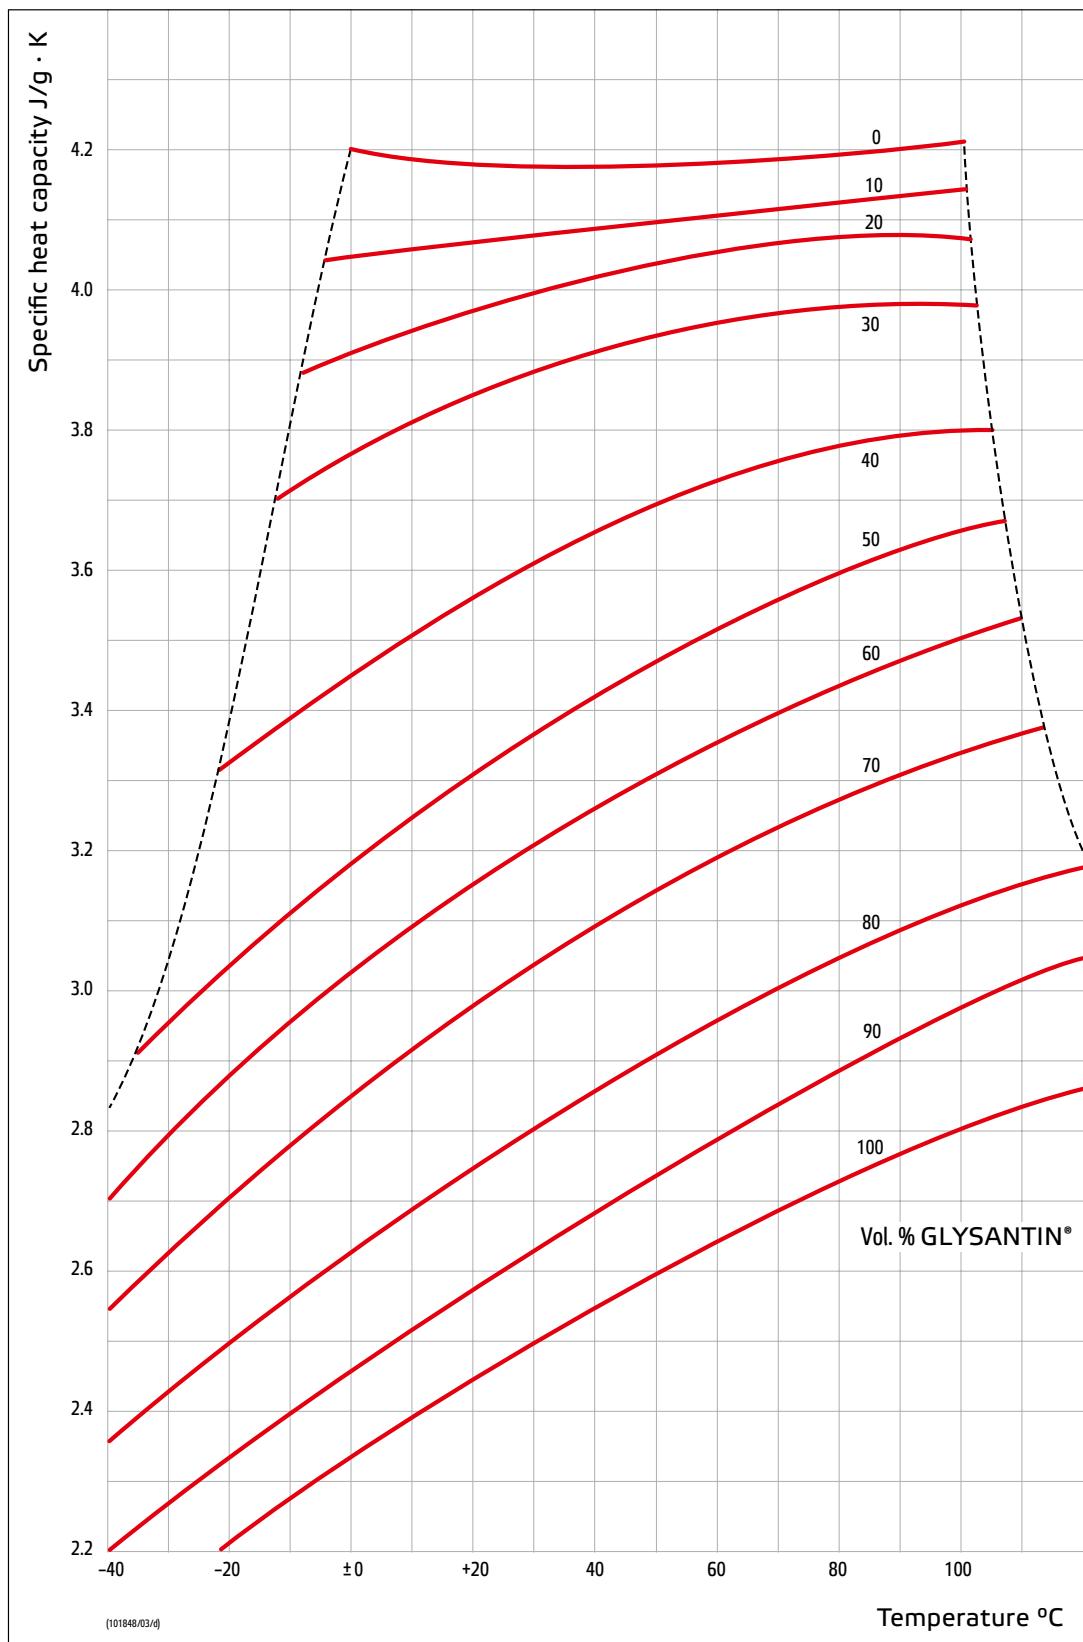



Heat conductivity


of mixtures of GLYSANTIN® and water as a function of temperature and concentration.

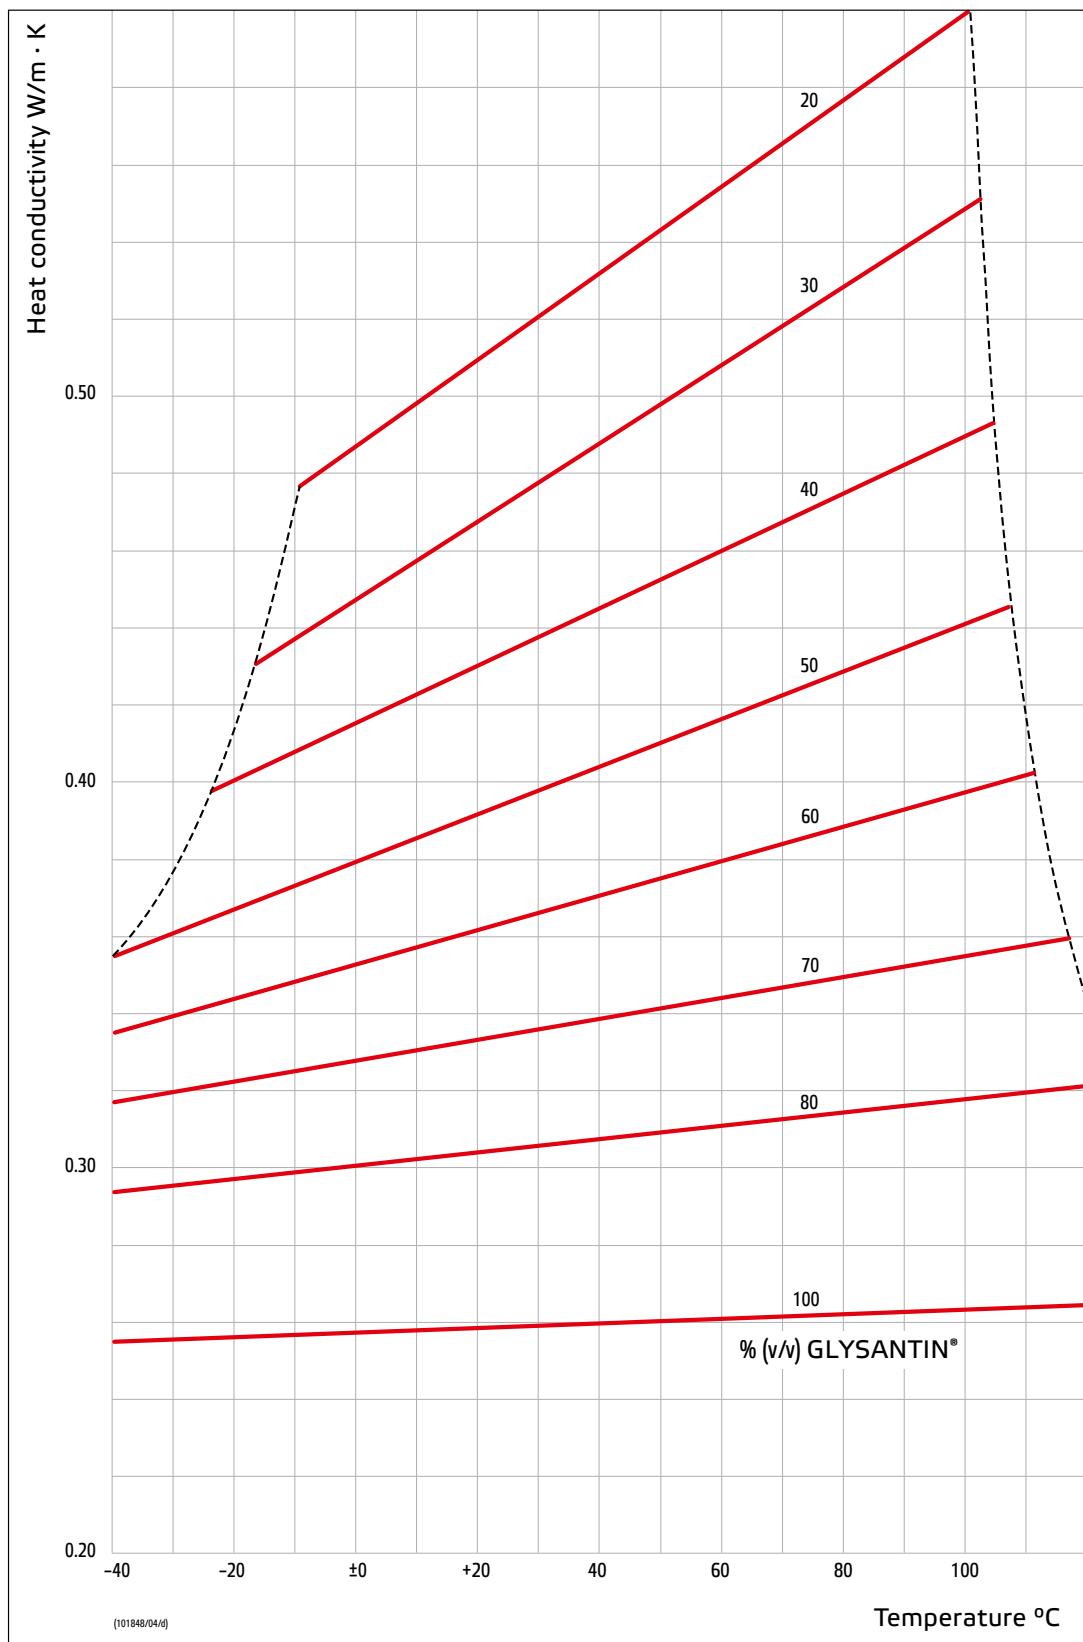



Prandtl numbers


of mixtures of GLYSANTIN® and water as a function of temperature and concentration.

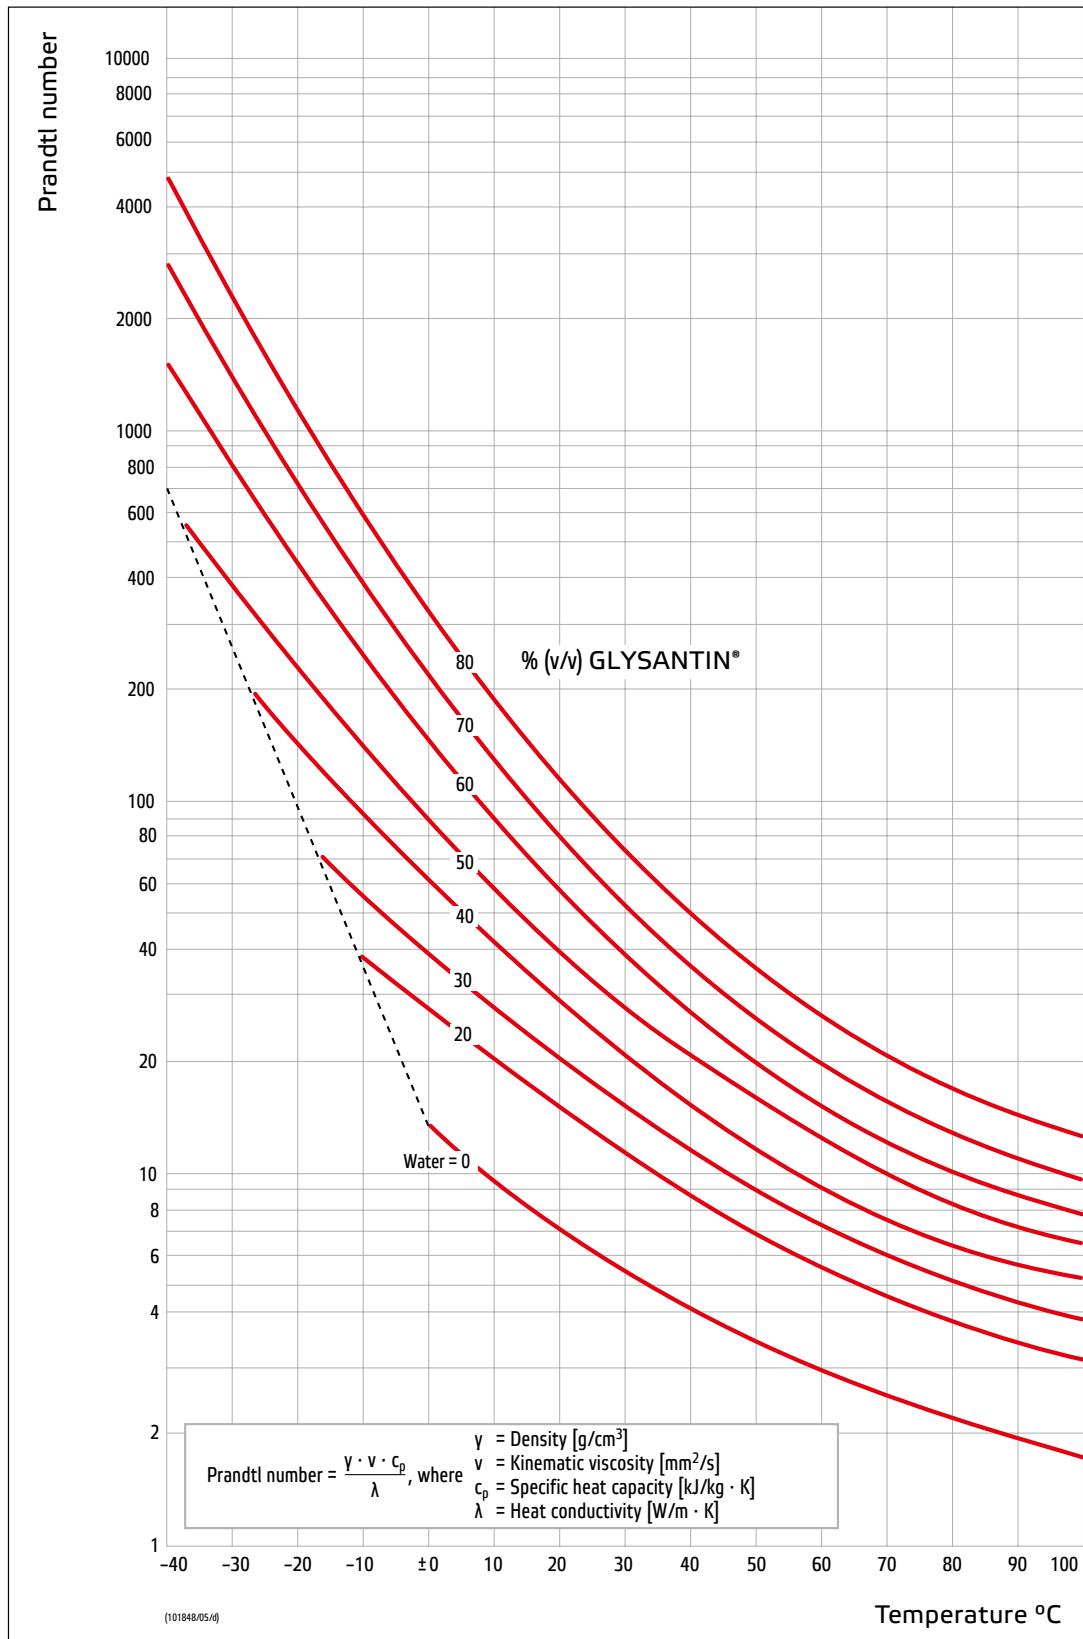



Vapour pressure

of mixtures of GLYSANTIN® and water as a function of concentration.

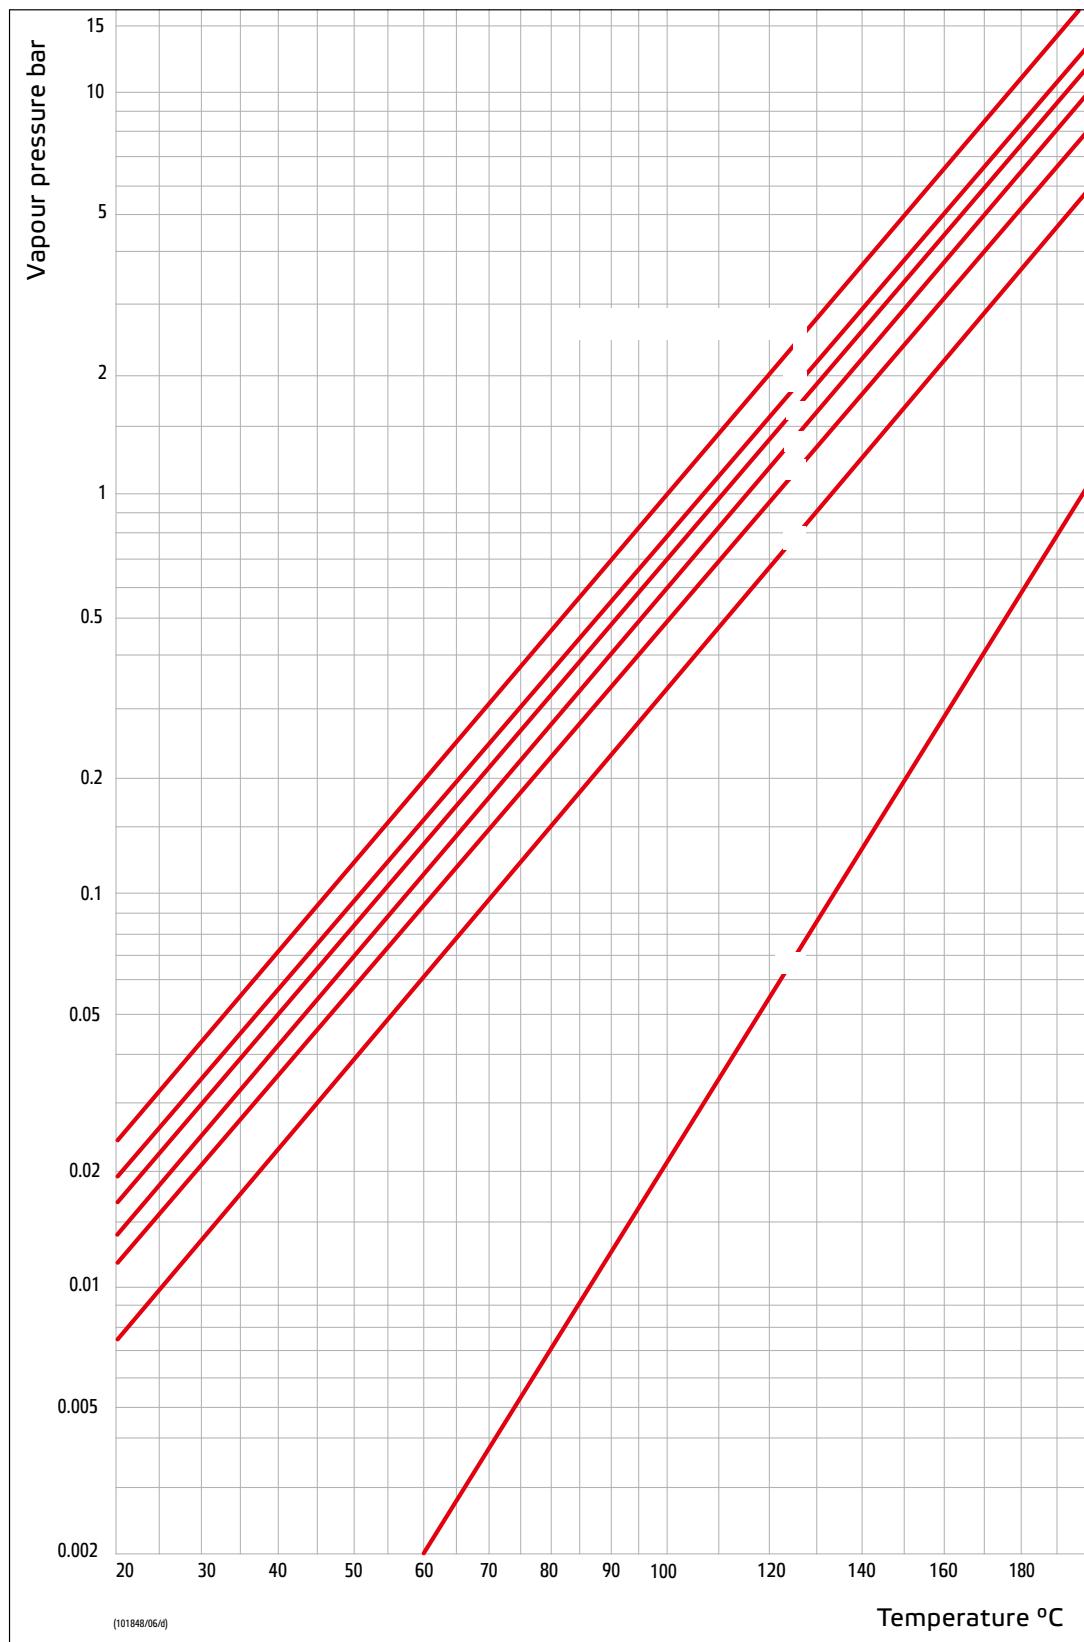


(101048/06/d)

Temperature °C



Boiling point isobars


of mixtures of GLYSANTIN® and water as a function of concentration.

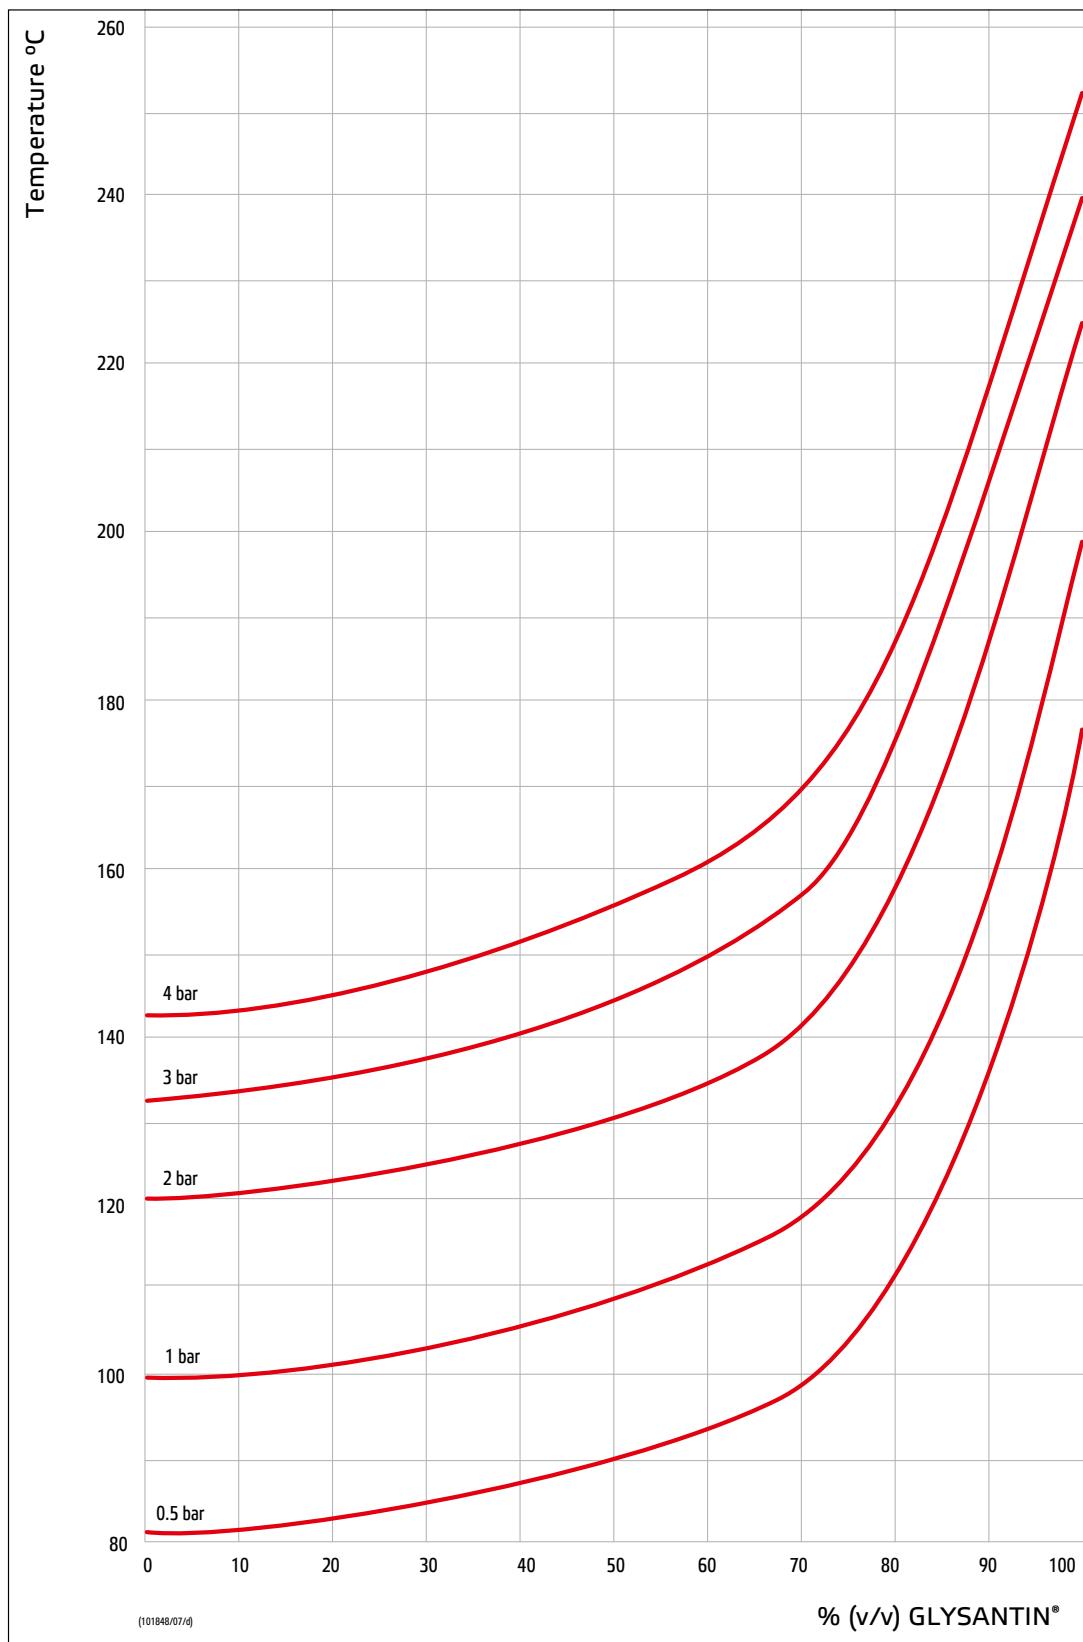



Coefficients of cubic expansion


of mixtures of GLYSANTIN® and water as a function of temperature and concentration.

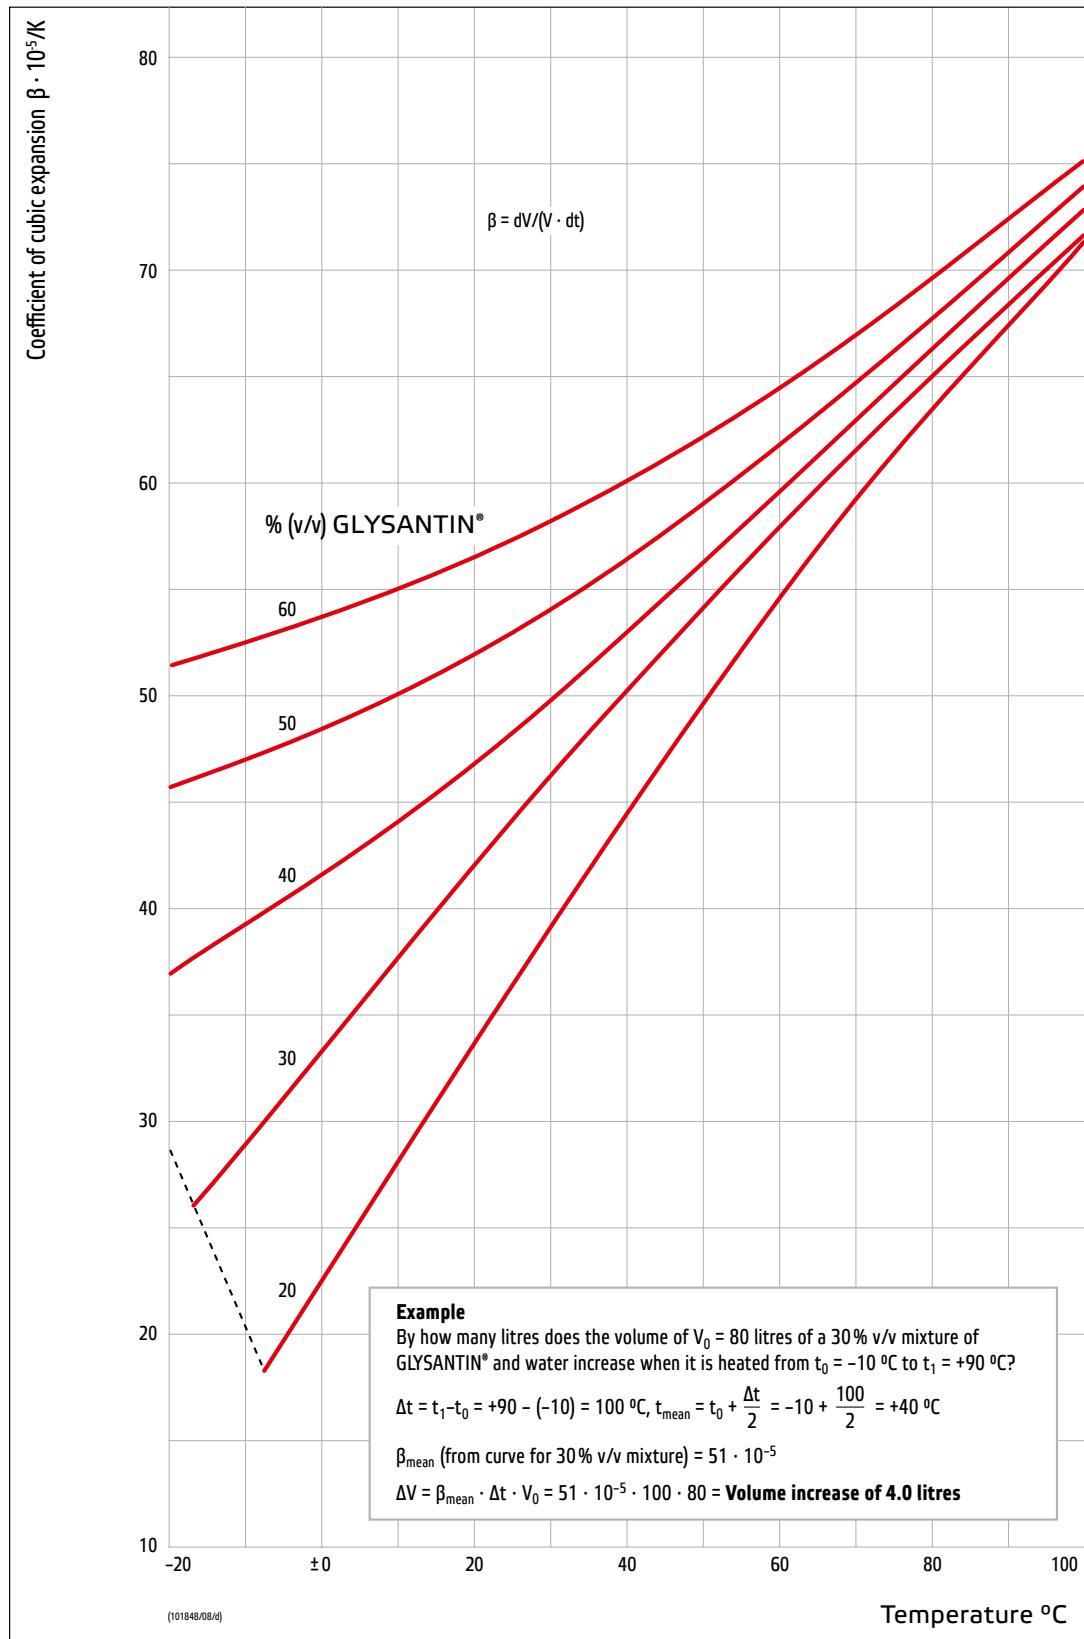



Relative pressure drop factors


of mixtures of GLYSANTIN® and water as a function of temperature and concentration.

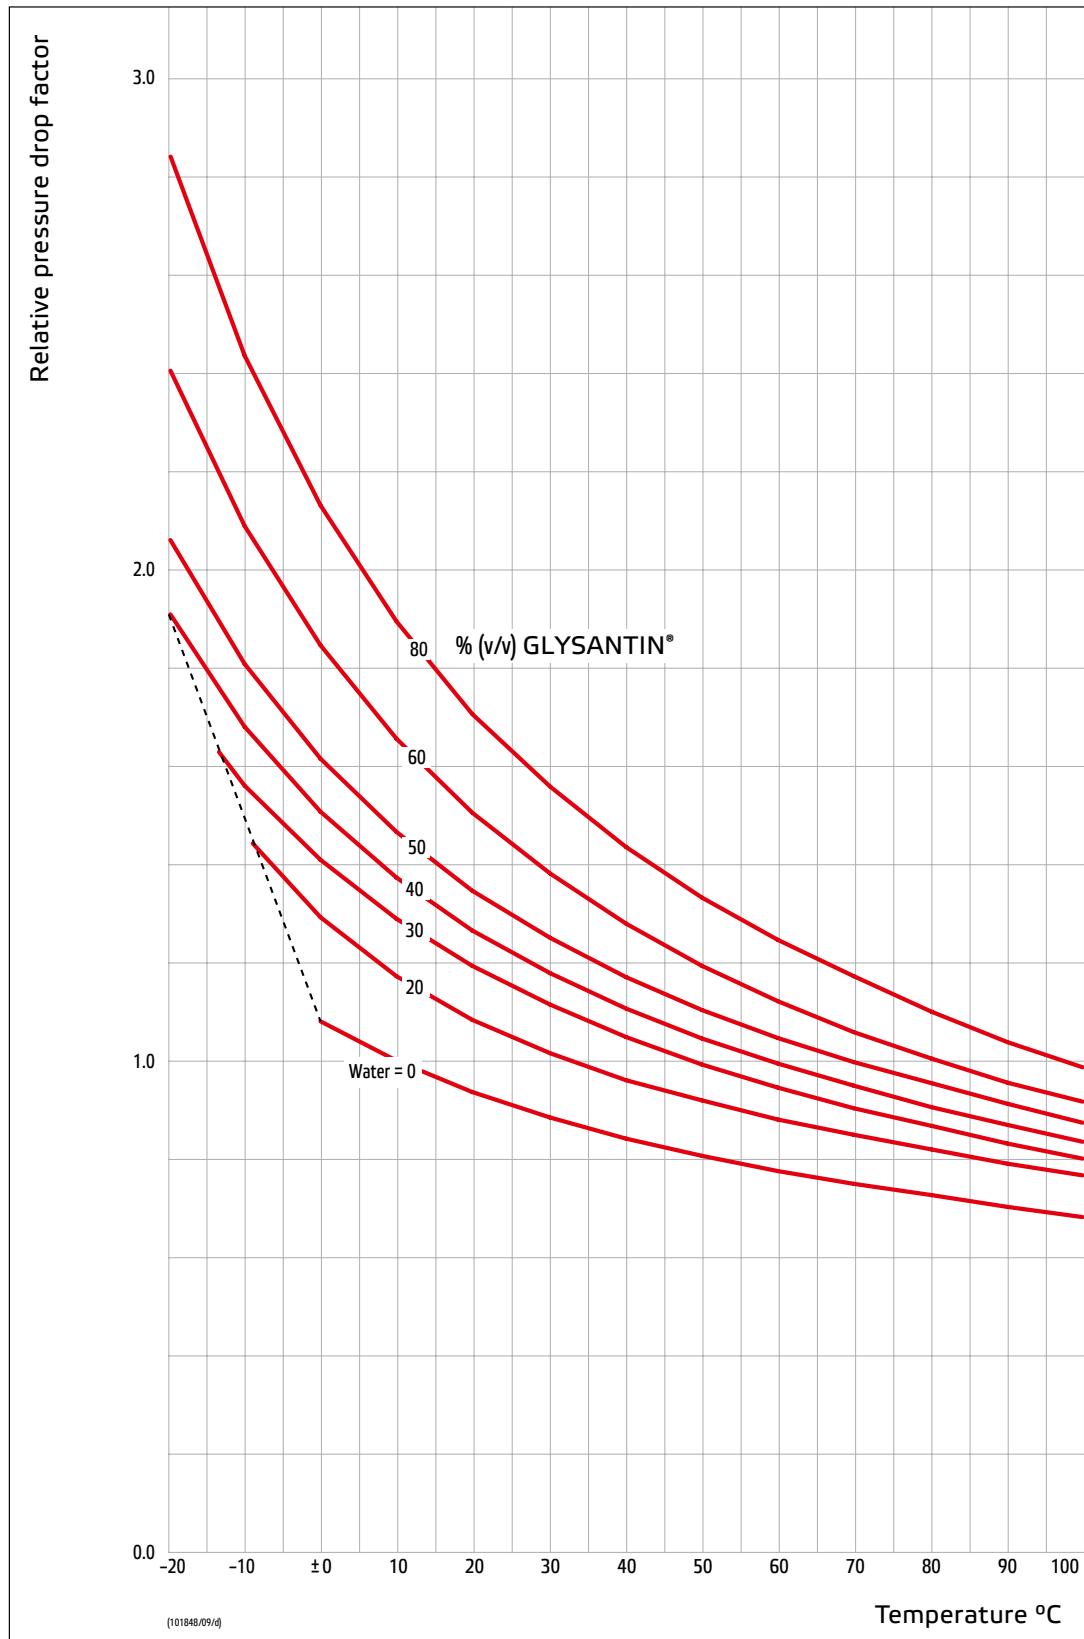



Frost protection

provided by mixtures of GLYSANTIN® and water.

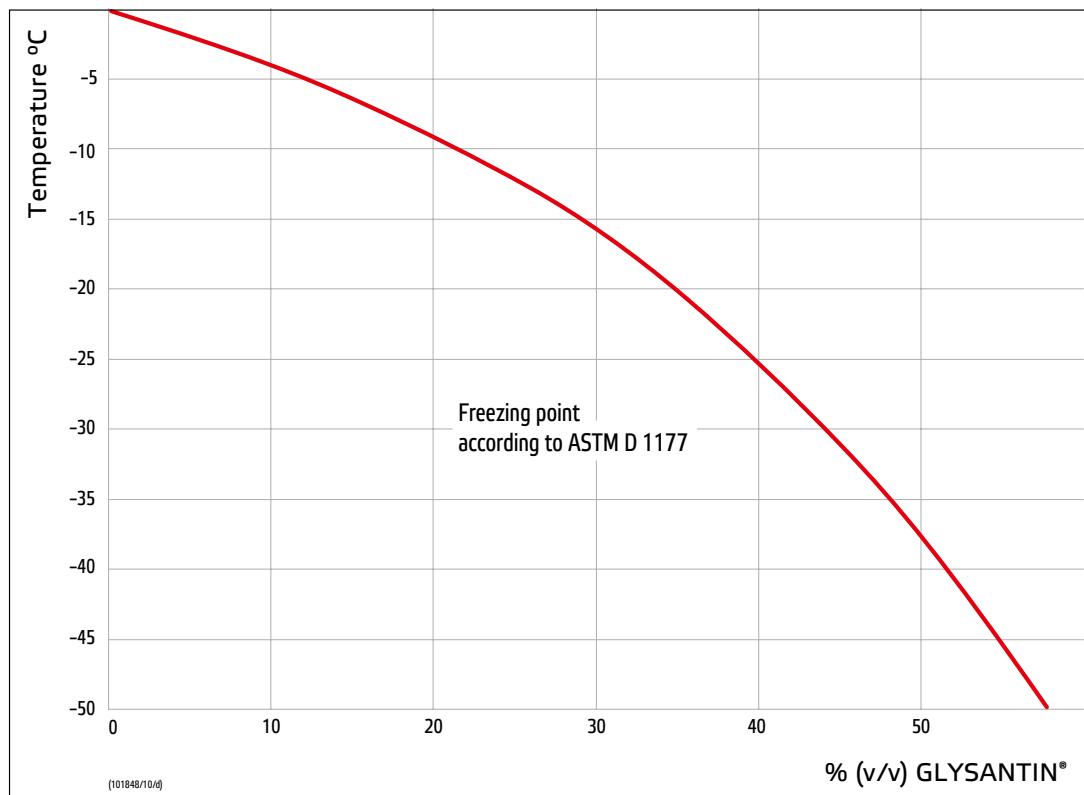

Note:

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our product, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the product for a specific purpose. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed.

Zur Beachtung:

Die Angaben in dieser Druckschrift basieren auf unseren derzeitigen Kenntnissen und Erfahrungen. Sie befreien den Verarbeiter wegen der Fülle möglicher Einflüsse bei Verarbeitung und Anwendung unseres Produktes nicht von eigenen Prüfung und Versuchen. Eine Garantie bestimmter Eigenschaften oder die Eignung des Produktes für einen konkreten Einsatzzweck kann aus unseren Angaben nicht abgeleitet werden. Etwaige Schutzrechte sowie bestehende Gesetze und Bestimmungen sind vom Empfänger unseres Produktes in eigener Verantwortung zu beachten.

BASF SE
Fuel and Lubricant Solutions
67056 Ludwigshafen, Germany
www.glysantin.com